


### Overview

#### HPE ProLiant DL560 Gen10 Server

The HPE ProLiant DL560 Gen10 Server is a high-density, four-socket (4S) server with high performance, scalability and reliability, all in a 2U chassis. Supporting the latest Intel® Xeon® Scalable processors, the HPE ProLiant DL560 Gen10 Server offers greater processing power, up to 6 TB of faster memory, IO of up to eight PCIe 3.0 slots, plus the intelligence and simplicity of automated management with HPE OneView and HPE iLO 5.


The HPE ProLiant DL560 Gen10 Server is the ideal server for business critical workloads, virtualization, server consolidation, database, business processing, and general 4P data-intensive applications where data center space and the right performance are paramount.

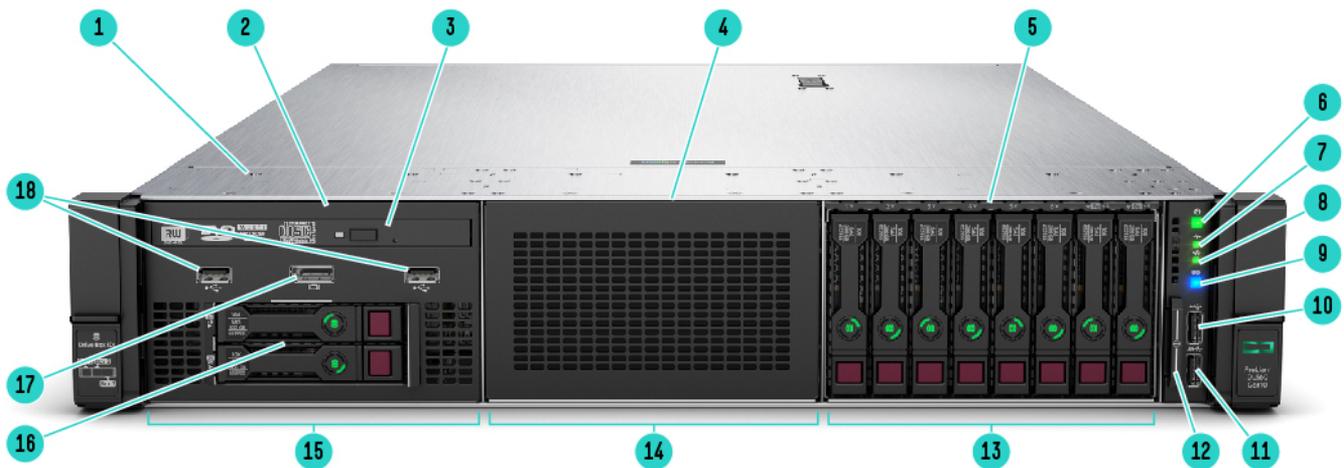

#### Front View – DL560 Gen10

1. Quick removal access panel
2. Optional Universal Media bay. 2 USB 2.0 and VGA standard (8 SFF bay or 6 SFF+2NVMe optional)
3. Optional Optical drive. Requires Universal Media bay
4. Drive Box 2. (8 SFF, 6SFF+2NVMe or 8 NVMe PCIe SSD optional)
5. Drive Box 3. (8 SFF, 6SFF+2NVMe optional)
6. Power On/Standby button and system power LED button
7. Health LED
9. UID button
11. USB 3.0
13. Box 3
15. Box 1
17. Optional front display port (via Universal Media Bay)
8. NIC status
10. iLO Front Service Port
12. Serial label pull tag
14. Box 2
16. Optional 2 SFF HDD, requires optional Universal Media bay
18. Optional USB 2.0 (via Universal Media Bay)


## Overview

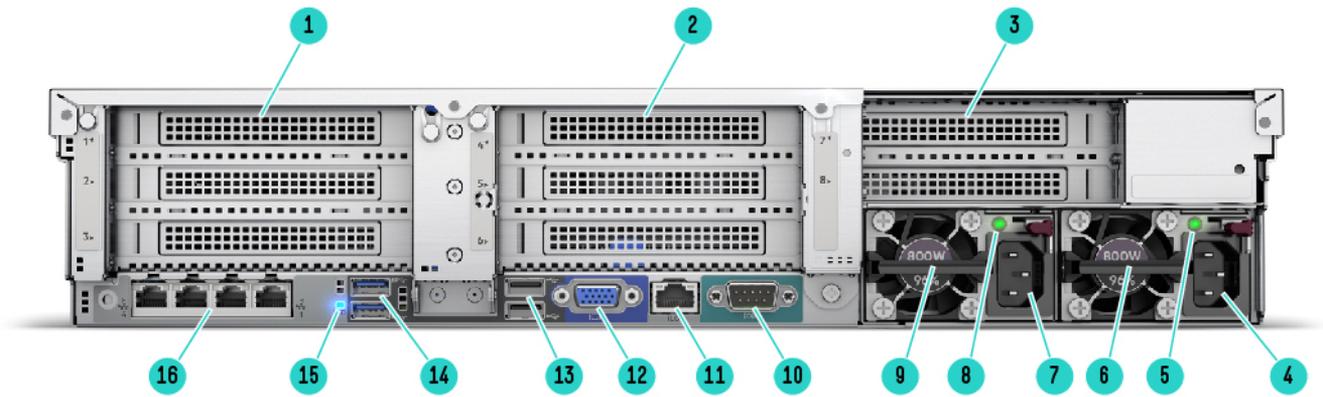

### Rear View – DL560 Gen10

- |  |  |
|--|--|
| 1. PCIe Slots (Slots 1-3 top to bottom, riser shipped standard)  | 2. PCIe Slots (Slots 4-6 top to bottom, requires second riser card and second processor) |
| 3. PCIe Slots (Slots 7-8 top to bottom), requires tertiary riser card and second processor, Not available with 4x Flex Slot power supplies | 4. Power supply power connection   |
| 5. Power supply power LED  | 6. HPE Flexible Slot Power Supply bay 1 (800W PS shown)                                  |
| 7. Power supply power connection   | 8. Power supply power LED  |
| 9. HPE Flexible Slot Power Supply bay 2 (800W PS shown)  | 10. Serial connector   |
| 11. Dedicated iLO connector  | 12. VGA (video) connector  |
| 13. USB connectors 2.0 (2)   | 14. USB connectors 3.0 (2)   |
| 15. Unit ID LED  | 16. FlexibleLOM ports (Port 1 on right side)   |

## Overview

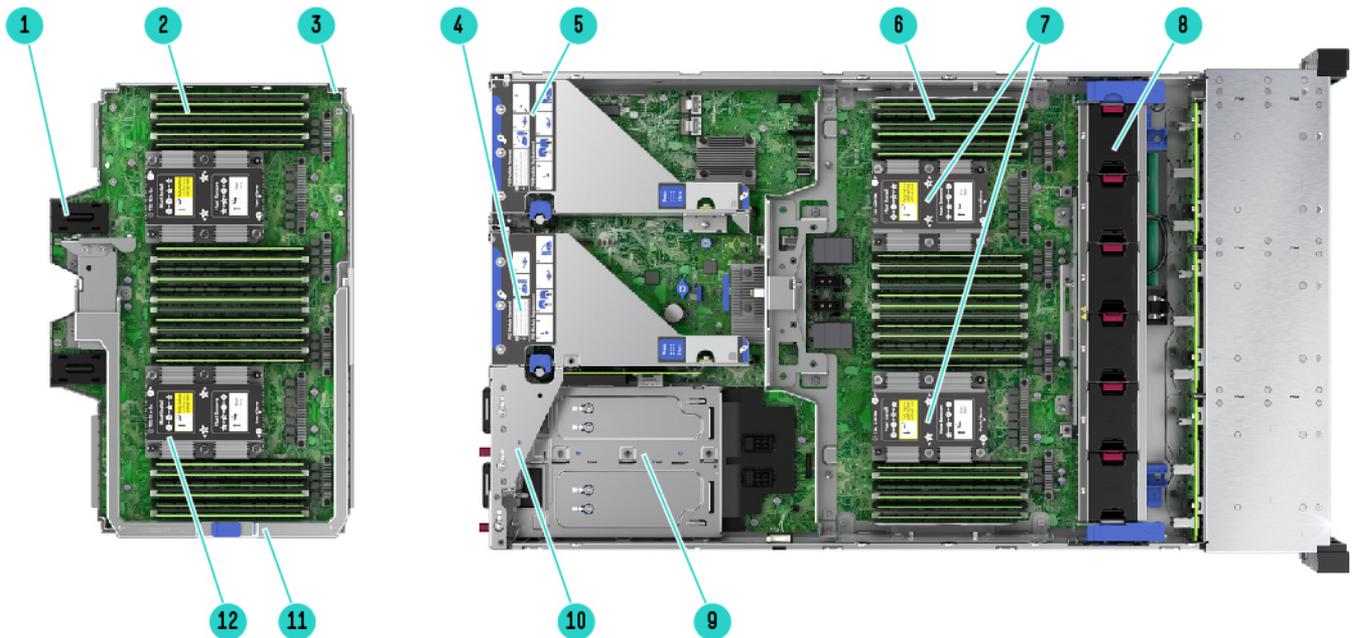

### Internal View: DL560 Gen10 with upper CPU mezzanine tray

1. Left connector used for DL560 4-port NVMe Mezzanine card (Daughter card)
2. DDR4 DIMM slots. Shown fully populated in 24 slots (12 per processor)
3. Upper CPU Mezzanine Board Kit
4. Optional secondary PCIe riser
5. Default primary PCIe riser
6. DDR4 DIMM slots on upper CPU mezzanine board kit. Shown fully populated in 24 slots (12 per processor)
7. 2 Processors, heatsink showing
8. Fan cage shown with 6 standard Hot-plug fans
9. (Under) Hot Plug redundant HPE Flexible Slot Power supplies
10. Optional Tertiary riser
11. Handle for removing upper CPU Mezzanine Board Kit
12. 2 Processors, heatsink showing on upper CPU mezzanine board kit

## What's New

- New HPE Smart Array P824i-p MR Gen10 (24 Internal Lanes/4GB Cache/CacheCade) 12G SAS PCIe Controller
- New 375GB NVMe Write Intensive drive
- New Dual SATA 6G M.2 – UFF to SFF SCM SSD
- New PCIe workload accelerator, HPE 750GB PCIe x4 Lanes WI HHHL Card
- Additional options on drives and NICs

## Platform Information

### Platform Information

<b>Form Factor</b>	2U Rack Form Factor Entry, Base and Performance pre-configured models ship with Gen10 Easy Install Rail Kits and Cable Management Assembly
<b>Chassis Types</b>	24 SFF with optional Universal Media Bay <b>NOTE:</b> The Universal Media Bay (872267-B21) is not available with the 24 SFF front end, and can only be populated in Box 1. <b>NOTE:</b> The 8 SFF can be upgraded with a drive cage to 16 or 24 SFF with field upgrades. For optimal upgrade Box 2 should be populated second, with Box 1 the last to be populated for a field upgrade to 24 SFF. <b>NOTE:</b> All pre-configured models come with embedded software RAID support for 10 SATA drives. Optional HPE Smart Array Controllers can be added.
<b>System Fans</b>	6 Hot Plug Fans (with N+1 redundancy) <b>NOTE:</b> 6 hot plug fans are shipped as standard.

## Standard Features

### Processors

One, two or four of the following depending on model.

**NOTE:** For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4 MT/s	Memory per socket
<b>Platinum Processors</b>							
Platinum 8180M Processor	2.5 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8180 Processor	2.5 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8176M Processor	2.1 GHz	28	38.50 MB	165W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8176 Processor	2.1 GHz	28	38.50 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8170M Processor	2.1 GHz	26	35.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8170 Processor	2.1 GHz	26	35.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8168 Processor	2.7 GHz	24	33.00 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8165 Processor	2.3 GHz	24	33.00 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8164 Processor	2.0 GHz	26	35.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8160M Processor	2.1 GHz	24	33.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8160 Processor	2.1 GHz	24	33.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8158 Processor	3.0 GHz	12	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8156 Processor	3.6 GHz	4	16.50 MB	105W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8153 Processor	2.0 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
<b>Gold Processors</b>							
Gold 6154 Processor	3.0 GHz	18	24.75 MB	200W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6152 Processor	2.1 GHz	22	30.25 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6150 Processor	2.7 GHz	18	24.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6148 Processor	2.4 GHz	20	27.50 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6146 Processor	3.2 GHz	12	24.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6144 Processor	3.5 GHz	8	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6143 Processor	2.8 GHz	16	22.00 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6142M Processor	2.6 GHz	16	22.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6142 Processor	2.6 GHz	16	22.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6140M Processor	2.3 GHz	18	24.75 MB	140W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6140 Processor	2.3 GHz	18	24.75 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6138 Processor	2.0 GHz	20	27.50 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6136 Processor	3.0 GHz	12	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6134M Processor	3.2 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6134 Processor	3.2 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6132 Processor	2.6 GHz	14	19.25 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6130 Processor	2.1 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6128 Processor	3.4 GHz	6	19.25 MB	115W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6126 Processor	2.6 GHz	12	19.25 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 5122 Processor	3.6 GHz	4	16.50 MB	105W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 5120 Processor	2.2 GHz	14	19.25 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768 GB
Gold 5118 Processor	2.3 GHz	12	16.50 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768 GB
Gold 5115 Processor	2.4 GHz	10	13.75 MB	85W	2 @ 10.4 GT/s	2400 MT/s	768 GB

**NOTE:** Platinum 8165 processor and Gold 6143 processors support core boosting technology.

## Standard Features

**NOTE:** Platinum - 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI, 8S - 3UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2666 MT/s, 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA), 48 lanes PCIe 3.0, advanced RAS.

**NOTE:** Gold - 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2400 MHz (SKU 5122=supports 2666), 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA) (SKU 5122 supports 2x 512 bit FMA), 48 lanes PCIe 3.0, advanced RAS.

**NOTE:** All processors ship with a normal or a high performance heatsink.

**NOTE:** 61xx and 81xx processors support 3 UPI links and all processors are connected in a cross bar configuration with each processor connected to another directly in a four processor system. 51xx processors support 2 UPI links only and all processors are connected in a ring configuration with processors 1, 3 and 2, 4 not connected directly in a four processor system.

### Chipset

Intel C621 Chipset

**NOTE:** For more information regarding Intel® chipsets, please see the following URL: <http://www.intel.com/products/server/chipsets/>

### On System Management Chipset

HPE iLO 5 ASIC

**NOTE:** Read and learn more in the [iLO QuickSpecs](#).

### Memory

One of the following depending on model

Type:	SmartMemory Registered (RDIMM), Load Reduced (LRDIMM)	
DIMM Slots Available	48	12 DIMM slots per processor, 6 channels per processor, 2 DIMMs per channel
Maximum capacity (LRDIMM)	6 TB	48 x 128 GB LRDIMM @ 2666 MT/s
Maximum capacity (RDIMM)	1.5 TB	48 x 32 GB RDIMM @ 2666 MT/s
Maximum capacity (NVDIMM)	384 GB	24 x 16 GB NVDIMM @ 2666 MT/s

**NOTE:** Mixing of RDIMM and LRDIMM memory is not supported.

**NOTE:** Memory speed depends on the processor selected.

**NOTE:** Intel memory processors (with suffix M) are needed for supporting 1.5TB memory per processor.

**NOTE:** Maximum of 6 NVDIMMs are supported per processor.

### Memory Protection

For details on the HPE Server Memory Options RAS feature, visit: <http://www.hpe.com/docs/memory-ras-feature>.

### Expansion Slots

Primary Riser (Standard)	Expansion Slots #	Technology	Bus/Connector Width	Form Factor/Connector	Notes
	1	PCIe 3.0	x8	¾ length/full height	Proc 1
	2	PCIe 3.0	X16	¾ length/full height	Proc 1
	3	PCIe 3.0	x8	¾ length/full height	Proc 1
	None	2 x M.2	SATA lanes	M.2	Chipset

## Standard Features

<b>Primary/Secondary Riser (Optional) 826704-B21</b>	<b>Expansion Slots (Primary/Secondary) #</b>	<b>Technology</b>	<b>Bus/Connector Width</b>	<b>Form Factor/Connector (Primary)</b>	<b>Form Factor/Connector (Secondary)</b>	<b>Notes (Primary/secondary)</b>
	2/5	PCIe 3.0	x16	¾ length/full height	Half length/full height	Proc 1/2
	3/6	PCIe 3.0	x16	¾ length/full height	Half length/full height	Proc 1/2
<b>Primary/Secondary Riser (Optional) 873418-B21</b>	<b>Expansion Slots (Primary/Secondary) #</b>	<b>Technology</b>	<b>Bus/Connector Width</b>	<b>Form Factor /Connector</b>		<b>Notes (Primary/secondary)</b>
	None	NVMe	x8	Slimline		Proc 1/2
	None	NVMe	x8	Slimline		Proc 1/2
	None	NVMe	x8	Slimline		Proc 1/2
<b>Primary/Secondary Riser (Optional) 873420-B21</b>	<b>Expansion Slots (Primary/Secondary)#</b>	<b>Technology</b>	<b>Bus/Connector Width</b>	<b>Form Factor/Connector (Primary)</b>	<b>Form Factor/Connector (Secondary)</b>	<b>Notes (Primary/Secondary)</b>
	1/4	PCIe 3.0	x8	¾ length/full height	Half length/full height	Proc 1/2
	2/5	PCIe 3.0	x8	¾ length/full height	Half length/full height	Proc 1/2
	3/6	PCIe 3.0	x8	¾ length/full height	Half length/full height	Proc 1/2
<b>Secondary Riser (Optional) 870548-B21</b>	<b>Expansion Slots #</b>	<b>Technology</b>	<b>Bus Width</b>	<b>Form Factor</b>		<b>Notes</b>
	4	PCIe 3.0	x8	Half length/full height		Proc 2
	5	PCIe 3.0	x16	Half length/full height		Proc 2
<b>Tertiary riser (Optional) 872253-B21</b>	<b>Expansion Slots #</b>	<b>Technology</b>	<b>Bus Width</b>	<b>Form Factor</b>		<b>Notes</b>
	7	PCIe 3.0	x8	Half length/full height		Proc 2

## Standard Features

	8	PCIe 3.0	x8	Half length/full height	Proc 2
<b>Tertiary riser (Optional) 872255-B21</b>	<b>Expansion Slots #</b>	<b>Technology</b>	<b>Bus Width</b>	<b>Form Factor/Connector</b>	<b>Notes</b>
	7	PCIe 3.0	x8	Half length/full height	Proc 2
	None	NVMe	x8	Slimline	Proc 2
<b>Tertiary riser (Optional) 872257-B21</b>	<b>Expansion Slots #</b>	<b>Technology</b>	<b>Bus Width</b>	<b>Form Factor/Connector</b>	<b>Notes</b>
	None	NVMe	x8	Slimline	Proc 2
	None	NVMe	x8	Slimline	Proc 2
<b>4-port NVMe Mezzanine card (Optional) 874633-B21</b>	<b>Expansion Slots #</b>	<b>Technology</b>	<b>Bus Width</b>	<b>Form Factor/Connector</b>	<b>Notes</b>
	None	NVMe	x8	Slimline	Proc 3
	None	NVMe	x8	Slimline	Proc 3
	None	NVMe	x8	Slimline	Proc 3
	None	NVMe	x8	Slimline	Proc 3

**NOTE:** The secondary and tertiary risers need the 2<sup>nd</sup> processor to be installed.

**NOTE:** The expansion slots at the back are numbered in ascending order from top to bottom and from left to right.

**NOTE:** Some riser kits (826704-B21, 873418-B21, 873420-B21) have FIO options with separate numbers and they do not ship with riser cages. Please review the FIO section for details.

**NOTE:** For additional details on ProLiant DL Gen10 server risers please visit:

<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>.

**NOTE:** The optional 4-port NVMe Mezzanine card 874633-B21 supports a maximum of 8 NVMe drives and does not consume a PCIe slot. It goes on top of the HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) and requires a four processor configuration.

**NOTE:** The tertiary risers can only be installed when using two PSUs. There is no space for tertiary risers when the four PSU's are installed. If a secondary riser is required it needs to be ordered separately. Please refer section HPE I/O Expansion Options.

**NOTE:** A maximum of 1 primary, 1 secondary and 1 tertiary riser can be installed in one server.

**NOTE:** Slimline riser kit (873418-B21) does not contain any additional PCIe slots.

## Network Controller

The HPE ProLiant DL560 Gen10 servers offer a flexible network technology - FlexibleLOMs, which offers customers a choice of 1 Gb, 10 Gb, 25 Gb or 10 Gb base-T Ethernet or converged networking in their embedded adapter. A range of NIC cards are also available to enhance networking capabilities.

**NOTE:** For additional details see the Networking Section of this document.

Model	Adapter
Entry Model	HPE Ethernet 1Gb 4-port 331FLR Adapter
Base Model	HPE FlexFabric 10Gb 2P 533FLR-T Adapter
Performance Model	HPE FlexFabric 10/25 Gb 2P 640FLR-SFP28 Adapter or HPE FlexFabric 10/25Gb 2P 631FLR-SFP28 Adapter

## Standard Features

### Storage Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

Software RAID HPE Smart Array S100i SR Gen10 SW RAID

**NOTE:** HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.

**NOTE:** HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled. For enabling, please select HPE FIO Enable Smart Array SW RAID (784308-B21).

Essential RAID	HPE Smart Array E208i-a SR G10 LH Controller
	HPE Smart Array E208i-p SR Gen10 Controller
	HPE Smart Array E208e-p SR Gen10 Controller
Performance RAID	HPE Smart Array P408i-a SR G10 LH Controller
	HPE Smart Array P408i-p SR Gen10 Controller
	HPE Smart Array P408e-p SR Gen10 Controller
	HPE Smart Array P816i-a SR G10 LH Controller
	HPE Smart Array P824i-p MR Gen10 Controller

### Internal Storage Devices

One of the following depending on model

Optical Drive Optional: DVD-ROM, DVD-RW

Hard Drives None ship standard

Hard Drive Bays 8 hot plug SFF SAS/SATA HDD Bays in Entry and Base Models  
16 hot plug SFF SAS/SATA HDD Bays in Performance Models

**NOTE:** Box 3 is populated by 8 SFF SAS/SATA bay and shipped as default.

**NOTE:** The 8 NVMe drive option can only be placed in Bay 2.

**NOTE:** The Universal Media Bay (872267-B21) not available with the 24 SFF front end, and can only be populated in Box 1.

**NOTE:** The 8 SFF can be upgraded with a drive cage to 16 or 24 SFF with field upgrades. For optimal upgrade Box 2 should be populated second, with Box 1 the last to be populated for a field upgrade to 24 SFF.

**NOTE:** A maximum of 12 NVMe drives can be supported with 2 NVMe drives in Bay 1, 8 NVMe drives in Bay 2 and 2 NVMe drives in Bay 3.

**NOTE:** All pre-configured models come with embedded software RAID support for 10 SATA drives. Optional HPE Smart Array Controllers can be added.

### Maximum Internal Storage

	CAPACITY	CONFIGURATION
Hot Plug SFF SATA HDD	48 TB	24 x 2 TB
Hot Plug SFF SAS HDD	48 TB	24 x 2 TB
Hot Plug SFF SATA SSD	92 TB	24 x 3.84 TB
Hot Plug SFF SAS SSD	367 TB	24 x 15.3 TB
SFF NVMe SSD	24 TB	12 x 4 TB

### Power Supply

One of the following depending on model

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

**NOTE:** Available in 94% and 96% efficiency.

**NOTE:** Also available in -48VDC and 227VAC/380VDC power inputs.

**NOTE:** Must order 4x800W Flex Slot PSU.

## Standard Features

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

**NOTE:** Available in 94% efficiency.

**NOTE:** 1600W Power supplies only support high line voltage (200VAC to 240VAC).

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (416151-B21). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#)

---

## Interfaces

Serial	1 rear
Video	1 front (optional with Universal Media Bay), 1 rear
HPE iLO Remote Management Network Port	1
HPE iLO Front Service Port	1
Micro SD Slot	1 (Internal), 2 (optional, internal)
USB 2.0 Ports	4 total: 2 front (optional); 2 rear
USB 3.0 Ports	5 total: 1 front; 2 rear, 2 internal

**NOTE:** 2 front (optional) USB 2.0 ports need the HPE DL560 Gen10 Universal Media Bay Kit (872267-B21).

---

## Operating Systems and Virtualization Software Support for ProLiant Servers

[Windows Server 2012 R2](#)

[Windows Server 2016](#)

[VMware ESXi 6.0 U3](#)

[VMware ESXi 6.5 and U1 upon release](#)

[Red Hat Enterprise Linux \(RHEL\) 6.9 and 7.3](#)

[SUSE Linux Enterprise Server \(SLES\) 11 SP4 and 12 SP2](#)

[CentOS 6.9 and 7.3](#)

[Citrix XenServer 7.1, 7.3, 7.4](#)

[Oracle Linux 7](#)

**NOTE:** Not directly supported / Community Supported (Based on RHEL so RHEL testing and enablement applicable to CentOS) CentOS 6.9 / CentOS 7.3.

**NOTE:** For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server. <http://www.hpe.com/info/ossupport>

---

## Industry Standard Compliance

ACPI 6.1 Compliant

PCIe 3.0 Compliant

WOL Support

Microsoft® Logo certifications

## Standard Features

PXE Support  
USB 3.0 Compliant (internal); USB 2.0 Compliant (external ports via SUV)  
SMBIOS 3.1  
UEFI 2.6  
Redfish API

**NOTE:** For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>.

---

## Graphics

- Integrated Video Standard
  - Video modes up to 1920 x 1200@60Hz (32 bpp)
  - 16MB Video Memory
  - HPE iLO 5 on system management memory
  - 32 MB Flash
  - 4 Gbit DDR 3 with ECC protection
- 

## HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

**NOTE:** The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload profiles for simple performance optimization

UEFI Boot Mode only:

- TPM 2.0 support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled
- iSCSI Software Initiator Support
- HTTP/HTTPS Boot support as a PXE alternative
- Boot support for option cards that only support a UEFI option ROM

**NOTE:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

**NOTE:** UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Server.

---

## Embedded Management

### HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>.

### UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>.

## Standard Features

**Intelligent Provisioning** Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

**iLO RESTful API** iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

---

## Server Utilities

**Active Health System** The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

**Active Health System Viewer** Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

**Smart Update** Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at <http://www.hpe.com/info/smartupdate>.

**iLO Amplifier Pack** Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities. Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

**HPE iLO Mobile Application** Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

**RESTful Interface Tool** RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

**Scripting Tools** Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/stk> or <http://www.hpe.com/servers/powershell>.

**HPE OneView Standard** HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.hpe.com/info/oneview>.

**HPE Systems Insight Manager (HPE SIM)** Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/info/hpesim>.

---

## Security

UEFI Secure Boot and Secure Start support

Immutable Silicon Root of Trust

FIPS 140-2 validation (iLO 5 certification in progress)

## Standard Features

- Common Criteria certification (iLO 5 certification in progress)
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- iLO Security Modes including a New iLO Advance Premium Security Edition License
- Granular control over iLO interfaces
- Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
- Tamper-free updates – components digitally signed and verified
- Secure Recovery – recover critical firmware to known good state on detection of compromised firmware
- Ability to rollback firmware
- Secure erase of NAND/User data
- TPM (Trusted Platform Module) 1.2 option
- TPM (Trusted Platform Module) 2.0 option Bezel Locking Kit
- Chassis Intrusion detection option

**NOTE:** HPE Trusted Platform Module 2.0 Option (864279-B21) works with Gen10 servers with UEFI Mode and not Legacy Mode. The Trusted Platform Module 2.0 Option can be configured to the 1.2 version through the UEFI BIOS to support TPM 1.2 functionality.

**NOTE:** HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

---

### About Trusted Platform Module

Trusted Platform Module (TPM) is a separate processor that monitors the system state. TPM is a passive component needing to be updated and not able to lock down any component in the system except access to its own memory. It also provides some cryptographic operations - among them: creating RSA key pairs, and working with them.

The first verification of signatures happens by code on the CPU, which can be intercepted and replaced. Emulating a "properly" booted system is possible by sending the right values to the TPM.

HPE supports two version of TPM, the 1.2 device and the 2.0 device. The TPM 2.0 device works with Gen10 servers that are using a Linux operating system or Microsoft Windows Server 2016. Both TPM 1.2 and 2.0 are compatible with HPE ProLiant Gen9 and Gen10 servers. These TPM modules are not compatible with server generations prior to Gen9. Once the TPM module is installed, it locks into place and cannot be removed, nor can it be replaced with a different TPM device.

### HPE Silicon Root of Trust

HPE's Silicon Root of Trust provides protection because as soon as the server is powered on and the iLO firmware comes alive, it looks into the silicon for the immutable fingerprint that verifies all the firmware code is valid and uncompromised. Over a million lines of firmware code run, before the operating system starts, making it essential to confirm that all server essential firmware is free from malware or compromised code.

Silicon Root of Trust is included with iLO5 Standard with all platforms that contain the iLO5 chip. That includes ML, DL, Apollo, C-Class Blades, and Synergy Compute Modules. HPE Cloudline and the HPE Microserver do not have silicon root of trust, since they do not contain an iLO5 silicon chip. This technology is NOT available on any previous version of HP ProLiant like the Gen9, Gen8, or Gen 7 servers, nor can those previous generations be retrofitted to accommodate the silicon root of trust.

The silicon validates the iLO 5 firmware code before it is fetched and executed. If any malware or compromised code has been inserted in the iLO 5 firmware, the silicon will detect that, because any infected firmware code will not match-up with the hash burned into the silicon. From there, the iLO 5 firmware validates the rest of the server firmware, namely the UEFI, CPLD, IE, and ME. The UEFI then validates the connection to the operating system, thus completing a complete root, or chain, that is anchored into the silicon.

During operation of the server, HPE has a new technology that conducts run-time firmware validation that checks the firmware stored in the server. At any point, if compromised code or malware is inserted in any of the critical firmware, an iLO audit log alert is created to notify the customer that a compromised has occurred.

## Standard Features

In the unlikely event of a breach into the HPE server firmware, after detection has been completed, the customer may then securely recover the firmware automatically to a previous known good state. HPE provides this function through a new HPE license called, HPE iLO Advanced Premium Security Edition.

### Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

## Optional Features

### Server Management

#### HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <http://www.hpe.com/servers/iloadvanced>.

#### HPE iLO Advanced Premium Security Edition

HPE iLO Advanced Premium Security Edition for iLO 5 includes iLO Advanced License plus high-end security modes, unique security capabilities, like Automatic FW recovery; Runtime FW verification, and Secure erase. Learn more about HPE iLO Advanced Premium Security Edition at: <http://www.hpe.com/servers/ilopremium>.

#### HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>.

#### HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

---

### GPGPU Information

HPE NVIDIA Quadro P2000 Graphics Accelerator

---

### Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

---

## Optional Features

### One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance.

**<https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>**

## Service and Support

### HPE Pointnext - Service and Support

#### Protect your business beyond warranty with HPE Pointnext Operational Service

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provides innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. HPE is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.

#### Connect your devices:

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to HPE support.

1- IDC 2 - HP CSC reports 2014 - 2015

Learn more about getting connected at <http://www.hpe.com/services/getconnected>.

### Recommended Services

#### HPE Proactive Care\* with 6 hour call-to-repair commitment, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years' proactive reporting and advice with our highest level of hardware support - HPE's 24x7, six hour hardware call-to-repair. HPE is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

#### HPE Proactive Care\* with 24x7 coverage, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

#### HPE Proactive Care\* - Next Business Day service, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years of Hardware Support where an HPE authorized representative will arrive at the Customer's site during the onsite coverage window to begin hardware maintenance service the next coverage day after the service request has been logged. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

## Service and Support

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

\*HPE Proactive Care and HPE Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.

---

### Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

---

### Other related Services

#### HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

#### HPE Installation and Startup Service

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

---

#### HPE Datacenter Care service

HPE Datacenter Care helps improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services “building blocks.” You can deploy, operate, and evolve your datacenter wherever you are on your IT journey. With HPE Datacenter Care, you benefit from a personalized relationship with HPE via a single point of accountability for HPE and others’ products. For more information, visit <http://www.hpe.com/services/datacentercare>

#### HPE GreenLake Flex Capacity

With HPE GreenLake Flex Capacity, you get the speed, scalability, and economics of the public cloud in the privacy of your data center. Gain the advantages of the public cloud—consumption-based payment, rapid scalability without worrying about capacity constraints. Reduce the “heavy lifting” needed to operate a data center. And retain the advantages that IT provides the business (i.e., control, security). Deliver the right user experience, choose the right technology for the business, manage privacy and compliance, and manage the cost of IT. And, you have the option to use the public cloud when needed.

---

#### DC for Hyperscale

Datacenter Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

#### HPE Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

## Service and Support

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAXxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

### HPE Service Credits

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

---

### HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

<http://www.hpe.com/ww/learn>

---

### HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>.

HPE's Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

\*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.

---

**NOTE:** HPE ProLiant DL560 Gen10 Server is covered under the HPE Service Contract applied to the HPE ProLiant Server. No separate HPE support services need to be purchased.

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [HERE](#).

## Pre-configured Models

	Entry Models		Base Models
<b>SKU Number</b>	840369-B21	875807-B21	840370-B21
<b>Model Name</b>	HPE ProLiant DL560 Gen10 5120 2.0GHz 14-core 2P 32GB-R S100i 8SFF 1x1600W PS Entry Server	HPE ProLiant DL560 Gen10 6130 2.1GHz 16-core 2P 64GB-R P408i-a 8SFF 2x1600W PS Entry Server	HPE ProLiant DL560 Gen10 6148 2.4GHz 20-core 4P 128GB-R P408i-a 8SFF 2x1600W PS Base Server
<b>Processor</b>	Intel® Xeon® 5120	Intel® Xeon® 6130	Intel® Xeon® 6148
<b>Number of Processors</b>	2	2	4
<b>Memory</b>	32 GB (2x16GB Registered DIMMs, 2666 MT/s) <b>NOTE:</b> 24 DIMM slots available with Entry Model; 2 more processor slots and 24 more DIMMs available via optional HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21).	64 GB (4x16GB Registered DIMMs, 2666 MT/s) <b>NOTE:</b> 24 DIMM slots available with Entry Model; 2 more processor slots and 24 more DIMMs available via optional HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21).	128 GB (8x16GB Registered DIMMs, 2666 MT/s )
<b>Network Controller</b>	1 Gb 4-port 331FLR Adapter	10GbE FlexFabric 2-port 533FLR-T Adapter	10GbE FlexFabric 2-port 533FLR-T Adapter
<b>Storage Controller</b>	HPE Smart Array S100i Software RAID <b>NOTE:</b> Additional Storage controllers are available as options, to enable both SAS capability as well as provide data retention with flash-backed write cache (FBWC).	HPE Smart Array P408i-a <b>NOTE:</b> Additional storage controllers are available as options.	HPE Smart Array P408i-a <b>NOTE:</b> Additional storage controllers are available as options.
<b>Power Supply</b>	1x 1600W	2x 1600W	2x 1600W
	<b>NOTE:</b> 1600W Power supplies only support high line voltage (200VAC to 240VAC).		
<b>PCI-Express Slots</b>	3 PCIe 3.0 slots available <b>NOTE:</b> 8 PCIe 3.0 slots available with the secondary and tertiary riser installed.	3 PCIe 3.0 slots available <b>NOTE:</b> 8 PCIe 3.0 slots available with the secondary and tertiary riser installed.	6 PCIe 3.0 slots available <b>NOTE:</b> 8 PCIe 3.0 slots available with the tertiary riser installed.
<b>Hard Drive</b>	None ship standard		
<b>Internal Storage</b>	8 SFF Drive Bays <b>NOTE:</b> Can be expanded up to a max of 24 SFF drives, with optional HPE DL560 Gen10 8SFF HDD Bay2 Kit (872235-B21) and HPE DL560 Gen10 8 SFF HDD Bay1 Kit (872231-B21). <b>NOTE:</b> Optionally NVMe SSD drives can be added with HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8 SFF Bay1 Kit (872227-B21) or HPE DL560 Gen10 Prem 6 SFF+2 NVMe Bay2 Kit(872229-B21) or HPE DL560 Gen10 Premium 6 SFF and 2 NVMe or 8 SFF Bay3 Kit (872231-B21) or HPE DL560 NVMe 8 SSD Express Bay Enablement Kit (872225-B21). <b>NOTE:</b> Alternatively, optional HPE DL560 Gen10 Universal Media Bay Kit.		
<b>Optical Drive Bay</b>	Optional via Universal Media Bay		
<b>Optical Drive</b>	Optional via Universal Media Bay		
<b>Fans</b>	6 hot plug fans, redundant		
<b>Management</b>	HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced, HPE iLO Advanced Premium Security Edition and HPE OneView Advanced (require licenses)		

## Pre-configured Models

<b>Form Factor</b>	Rack (2U), HPE Easy Install Rails with CMA
<b>Warranty</b>	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response

Performance Models	
<b>SKU Number</b>	840371-B21
<b>Model Name</b>	HPE ProLiant DL560 Gen10 8170 2.1GHz 26-core 4P 256GB-R P816i-a 16SFF 2x1600W PS Perf Server
<b>Processor</b>	Intel® Xeon® 8170
<b>Number of Processors</b>	4
<b>Memory</b>	256 GB (8x 16 GB Registered DIMMs, 2666 MT/s)
<b>Network Controller</b>	10/25Gb2p 640FLR-SFP28 Adapter
<b>Storage Controller</b>	Smart Array P816i-a
<b>PCI-Express Slots</b>	8 PCIe 3.0 slots available
<b>Power Supply</b>	2x 1600W <b>NOTE: 1600W Power supplies only support high line voltage (200VAC to 240VAC).</b>
<b>Hard Drive</b>	None ship standard
<b>Internal Storage</b>	8 SFF Drive Bays
<b>Optical Drive Bay</b>	None ship standard. optional via Universal Media Bay
<b>Optical Drive</b>	None ship standard. optional via Universal Media Bay
<b>Fans</b>	6 hot plug fans, redundant
<b>Management</b>	HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced (included), HPE iLO Advanced Premium Security Edition (require licenses) and HPE OneView Advanced (included)
<b>Form Factor</b>	Rack (2U), HPE Easy Install Rails with CMA
<b>Warranty</b>	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response
<b>NOTE: UEFI is the standard default for all pre-defined models.</b>	

## Country Code Key

xx1 = B21

Worldwide

**NOTE: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.**

xx1 = 291

Japan

xx1 = AA1

PRC

## SMB Models

<b>SKU Number</b>	840369-xxx	875807-xxx
<b>Model Name</b>	HPE DL560 Gen10 Intel Xeon-Gold 5120 (2.2GHz/14-core/105W) FIO Processor Kit	HPE DL560 Gen10 Intel Xeon-Gold 6130 (2.1GHz/16-core/125W) FIO Processor Kit
<b>Processor</b>	Intel® Xeon® 5120 (14-Core, 2.2GHz, 105W)	Intel® Xeon® 6130 (16-Core, 2.1GHz, 125W)
<b>Number of Processors</b>	Two Processors	
<b>Memory</b>	32 GB (2x16GB Registered DIMMs, 2666 MT/s) <b>NOTE:</b> 24 DIMM slots available with Entry Model; 2 more processor slots and 24 more DIMMs available via optional HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21).	64 GB (4x16GB Registered DIMMs, 2666 MT/s) <b>NOTE:</b> 24 DIMM slots available with Entry Model; 2 more processor slots and 24 more DIMMs available via optional HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21).
<b>Network Controller</b>	1 Gb 4-port 331FLR Adapter	10GbE FlexFabric 2-port 533FLR-T Adapter
<b>Storage Controller</b>	HPE Smart Array S100i Software RAID <b>NOTE:</b> Additional Storage controllers are available as options, to enable both SAS capability as well as provide data Retention with flash-backed write cache (FBWC).	HPE Smart Array P408i-a <b>NOTE:</b> Additional storage controllers are available as Options.
<b>Power Supply</b>	1x 1600W <b>NOTE:</b> 1600W Power supplies only support high line voltage (200VAC to 240VAC).	2x 1600W
<b>Riser Kit</b>	HPE DL Gen10 x8/x16/x8 Riser Kit	
<b>PCI-Express Slots</b>	3 PCIe 3.0 slots available <b>NOTE:</b> 8 PCIe 3.0 slots available with the secondary and tertiary riser installed.	
<b>Hard drive</b>	None shipped as Standard	
<b>Internal Storage</b>	8 SFF Drive Bays <b>NOTE:</b> Can be expanded up to a max of 24 SFF drives, with optional HPE DL560 Gen10 8SFF HDD Bay2 Kit (872235-B21) and HPE DL560 Gen10 8 SFF HDD Bay1 Kit (872231-B21). <b>NOTE:</b> Optionally NVMe SSD drives can be added with HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8 SFF Bay1 Kit (872227-B21) or HPE DL560 Gen10 Prem 6 SFF+2 NVMe Bay2 Kit(872229-B21) or HPE DL560 Gen10 Premium 6 SFF and 2 NVMe or 8 SFF Bay3 Kit (872231-B21) or HPE DL560 NVMe 8 SSD Express Bay Enablement Kit (872225-B21). <b>NOTE:</b> Alternatively, optional HPE DL560 Gen10 Universal Media Bay Kit.	
<b>Storage Battery</b>	None	HPE 96W Smart Storage Battery with 145mm Cable Kit
<b>Optical Drive Bay</b>	Optional via Universal Media Bay	
<b>Optical Drive</b>	Optional via Universal Media Bay	
<b>Rail Kit</b>	HPE Easy Install Rails with CMA	
<b>Fans</b>	6 hot plug fans, redundant	
<b>Management</b>	HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced, HPE iLO Advanced Premium Security Edition and HPE OneView Advanced (require licenses)	
<b>Energy Star</b>	2.1 certified	
<b>Form Factor</b>	RACK (2U)	
<b>Warranty</b>	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response	

## Configuration Information - Factory Integrated Models

### Recommended

Offering the best combination of performance, value and availability, Recommended Options have been selected by HPE experts to provide the right technology for a range of workloads and market segments. Fully integrated into the ProLiant management and security experience, Recommended Options provide the best fit with timely availability.

### Extended

Extended Options provide an extended catalog of products tailored for customers in specific markets or with specific workloads, requiring the utmost in performance or value. Fully integrated into the ProLiant management and security experience, Extended Options represent great value and performance but typically have a longer lead-time.

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

### Step 1: Base Configuration (choose one of the following configurable models)

<b>Server description</b>	HPE DL560 Gen10 CTO Svr
<b>SKU Number</b>	841730-B21
<b>TAA SKU</b>	875797-B21
<b>Chipset</b>	Intel® C621 Chipset
<b>Processor</b>	2U Server Chassis with 2 processor slots available; 4 processor configuration would require optional HPE ProLiant HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21)
<b>DIMM Slots</b>	24 DIMM slots for RDIMM, LRDIMM DDR4 Memory; 48 DIMM configuration would require optional HPE ProLiant HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) and 4 processors
<b>Network Controller</b>	None. FlexibleLOM slot (various options can be chosen for networking; NIC cards also available via expansion slots)
<b>Storage Controller</b>	HPE Smart Array S100i <b>NOTE: HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled. For enabling, please select HPE FIO Enable Smart Array SW RAID (784308-B21).</b>
<b>PCIe</b>	3 PCIe 3.0 slots (8 PCIe 3.0 slots are available if second processor is chosen and a Secondary and Tertiary Riser Kits has been installed)
<b>Drive Cage - included</b>	8 SFF, no drives
<b>Fans</b>	6 hot plug fans, redundant
<b>Management</b>	HPE iLO Standard with Intelligent Provisioning and (Standard); HPE OneView Standard (requires download) and HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, HPE OneView Advanced (require additional licenses)
<b>microSD Slots</b>	1 microSD card slot (internal)
<b>TPM Connector</b>	1 Trusted Platform Module (TPM) connector
<b>UEFI</b>	BIOS Legacy mode (field configurable) or Unified Extensible Firmware Interface (UEFI) mode (default)
<b>USB</b>	7 USB ports (2 USB 2.0 and 5 USB 3.0)
<b>Video Ports</b>	2 video ports (1 front optional via the Universal Media Kit upgrade option, 1 rear)
<b>Rails</b>	Easy install rails and cable management arm are optional

**NOTE:** Trade Agreement Act (TAA) and means that these SKUs are manufactured in countries that are part of the global trade act. This provides greater security assurance that these servers come from countries that signed the agreement act. This is

## Configuration Information - Factory Integrated Models

particularly important to HPE customers in our federal sector and other verticals that have concerns about the country of origin for our solutions.

**NOTE:** TAA servers are only orderable in North America and Canada.

**NOTE:** PCIe slot availability is dependent on the number of processors and riser kits installed. Please refer to the "Expansion slots" section for more details.

**NOTE:** For the DL560 Gen10, the number of processors can be one, two or four installed. For four processors, the HPE DL5x0 Gen10 CPU Mezzanine Board Kit is required.

**NOTE:** This applies to CTO configurations, field upgrades may differ depending on field configuration.

### Step 2a: Choose Processor Options

#### Processor Option Kits

#### Required Processor

##### Intel Xeon-Platinum - Recommended

HPE DL560 Gen10 Intel® Xeon-Platinum 8180 (2.5GHz/28-core/205W) FIO Processor Kit (Recommended)	872766-L21
---	------------

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8176 (2.1GHz/28-core/165W) FIO Processor Kit (Recommended)	840379-L21
--	------------

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8168 (2.7GHz/24-core/205W) FIO Processor Kit (Recommended)	872768-L21
---	------------

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8160 (2.1GHz/24-core/145W) FIO Processor Kit (Recommended)	840381-L21
--	------------

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8156 (3.6GHz/4-core/105W) FIO Processor Kit (Recommended)	840395-L21
---	------------

**NOTE:** Ships with Performance Heatsink.

##### Intel Xeon-Platinum - Extended

HPE DL560 Gen10 Intel® Xeon-Platinum 8180M (2.5GHz/28-core/205W) FIO Processor Kit (Extended)	875335-L21
---	------------

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8170 (2.1GHz/26-core/165W) FIO Processor Kit (Extended)	870730-L21
--	------------

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8165 (2.8GHz/24-core/205W) FIO Processor Kit (Extended)	P00790-L21
---	------------

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8164 (2.0GHz/26-core/150W) FIO Processor Kit (Extended)	840383-L21
---	------------

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8160M (2.1GHz/24-core/145W) FIO Processor Kit (Extended)	875338-L21
---	------------

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8158 (3.0GHz/12-core/105W) FIO Processor Kit (Extended)	840397-L21
---	------------

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Platinum 8153 (2.0GHz/16-core/125W) FIO Processor Kit (Extended)	872841-L21
--	------------

## Configuration Information - Factory Integrated Models

### Intel Xeon-Gold - Recommended

HPE DL560 Gen10 Intel Xeon-Gold 6154 (3.0GHz/18-core/200W) FIO Processor Kit (Recommended) 872770-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6152 (2.1GHz/22-core/135W) FIO Processor Kit (Recommended) 840387-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6148 (2.4GHz/20-core/145W) FIO Processor Kit (Recommended) 840385-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6146 (3.2GHz/12-core/165W) FIO Processor Kit (Recommended) 872824-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6136 (3.0GHz/12-core/150W) FIO Processor Kit (Recommended) 872831-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6134 (3.3GHz/8-core/130W) FIO Processor Kit (Recommended) 872833-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6130 (2.1GHz/16-core/125W) FIO Processor Kit (Recommended) 840393-L21

HPE DL560 Gen10 Intel® Xeon-Gold 6126 (2.6GHz/12-core/120W) FIO Processor Kit (Recommended) 870734-L21

HPE DL560 Gen10 Intel Xeon-Gold 5120 (2.2GHz/14-core/105W) FIO Processor Kit (Recommended) 870738-L21

HPE DL560 Gen10 Intel Xeon-Gold 5118 (2.3GHz/12-core/105W) FIO Processor Kit (Recommended) 840399-L21

HPE DL560 Gen10 Intel® Xeon-Gold 5115 (2.4GHz/10-core/85W) FIO Processor Kit (Recommended) 875349-L21

### Intel Xeon-Gold - Extended

HPE DL560 Gen10 Intel Xeon-Gold 6150 (2.7GHz/18-core/165W) FIO Processor Kit (Extended) 870732-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6144 (3.5GHz/8-core/150W) FIO Processor Kit (Extended) 872826-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6143 (2.8GHz/16-core/205W) FIO Processor Kit (Extended) P00788-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6142 (2.6GHz/16-core/145W) FIO Processor Kit (Extended) 872828-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6140 (2.3GHz/18-core/140W) FIO Processor Kit (Extended) 840389-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel® Xeon-Gold 6138 (2.0GHz/20-core/120W) FIO Processor Kit (Extended) 872835-L21

HPE DL560 Gen10 Intel® Xeon-Gold 6134M (3.2GHz/8-core/130W) FIO Processor Kit (Extended) 875343-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6132 (2.6GHz/14-core/140W) FIO Processor Kit (Extended) 840391-L21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6128 (3.4GHz/6-core/115W) FIO Processor Kit (Extended) 872839-L21

**NOTE:** Ships with Performance Heatsink.

## Configuration Information - Factory Integrated Models

HPE DL560 Gen10 Intel Xeon-Gold 5122 (3.6GHz/4-core/105W) FIO Processor Kit (Extended) 870736-L21

**NOTE:** Ships with Performance Heatsink.

**NOTE:** If more than one processor is desired select one xxxxxx-L21 and one or three corresponding xxxxxx-B21 processors. Mixing different processor models is not supported.

### Step 2b: Choose Memory Options

Only one of the following from each list unless otherwise noted

#### Registered DIMMs (RDIMMs) - Recommended

HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended) 815097-B21

HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended) 815098-B21

HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended) 835955-B21

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended) 815100-B21

#### Registered DIMMs (RDIMMs) - Extended

HPE 8GB (1x8GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Extended) 876181-B21

#### Load Reduced DIMMs (LRDIMMs) - Recommended

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit (Recommended) 815101-B21

#### Load Reduced DIMMs (LRDIMMs) - Extended

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Memory Kit (Extended) 815102-B21

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

### Step 2c: Choose Power Supplies

Only one or more of the following from each list unless otherwise noted

#### HPE Flex Slot Power Supplies - Recommended

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (Recommended) 865438-B21

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (Recommended) 865414-B21

HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit (Recommended) 865434-B21

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (Recommended) 830272-B21

#### HPE Flex Slot Power Supplies - Extended

HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit (Extended) 865428-B21

**NOTE:** Select one or more power supplies. For 800W, 4 power supplies need to be selected.

**NOTE:** 1600W Power supplies only support high line voltage (200VAC to 240VAC).

**NOTE:** Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hpe.com/info/hppoweradvisor>.

**NOTE:** All power supplies in a server should match. Mixing Power Supplies is not supported.

**NOTE:** HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional power cords.

### Step 2d: Choose network adapters

Only one of the following from each list unless otherwise noted

#### Network Adapters - Recommended

HPE Ethernet 10/25Gb 2-port 631FLR-SFP28 Adapter (Recommended) 817709-B21

HPE FlexFabric 10Gb 4-port 536FLR-T Adapter (Recommended) 764302-B21

## Configuration Information - Factory Integrated Models

HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter (Recommended)	700751-B21
HPE Ethernet 10Gb 2-port 535FLR-T Adapter (Recommended)	817721-B21
HPE FlexFabric 10Gb 2-port 533FLR-T Adapter (Recommended)	700759-B21
HPE Ethernet 1Gb 4-port 366FLR Adapter (Recommended)	665240-B21
HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter (Recommended)	817749-B21

### Network Adapters - Extended

HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter (Extended)	727054-B21
HPE Ethernet 10Gb 2-port 562FLR-T Adapter (Extended)	817745-B21
HPE Ethernet 10/25Gb 2-port 622FLR-SFP28 Converged Network Adapter (Extended)	867334-B21
HPE Ethernet 100Gb 1-port 842QSFP28 Adapter (Extended)	874253-B21

## Step 3: Choose Additional Factory Integratable Options

Only one of the following from each list unless otherwise noted

### Risers - Recommended

HPE DL560 Gen10 4-port 8 NVMe Slimline FIO Riser Kit (Recommended)	876242-B21
HPE DL560 Gen10 x8/x8/x8 1-port 2 NVMe Slimline FIO Riser Kit (Recommended)	876245-B21
HPE DL38X Gen10 x16/x16 GPU Slot2/3 FIO Riser Kit (Recommended)	871676-B21

**NOTE:** For additional details on ProLiant DL Gen10 server risers please visit:

<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>

### HPE OneView

HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A
HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A

### BIOS Mode

HPE Legacy FIO Mode Setting	758959-B22
-----------------------------	------------

**NOTE:** Selecting this option will change the UEFI BIOS setting into Legacy BIOS Setting.

### Controller State

HP FIO Enable Smart Array B140i Setting	784308-B21
---	------------

**NOTE:** If not selecting an HPE Storage Controller, this option may be selected to support RAID and Hot-plug capabilities for SATA hard drives. The S100i does not support SAS hard drives.

## Step 4: Choose Additional Options for Factory Integration from Core and additional Options sections below

## Core Options

### Recommended

Offering the best combination of performance, value and availability, Recommended Options have been selected by HPE experts to provide the right technology for a range of workloads and market segments. Fully integrated into the ProLiant management and security experience, Recommended Options provide the best fit with timely availability.

### Extended

Extended Options provide an extended catalog of products tailored for customers in specific markets or with specific workloads, requiring the utmost in performance or value. Fully integrated into the ProLiant management and security experience, Extended Options represent great value and performance but typically have a longer lead-time.

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

### HPE Unique Options - Recommended

HPE DL5x0 Gen10 12Gb SAS Expander Card Kit with Cables (Recommended) 873444-B21

HPE DL560 Gen10 2SFF Premium HDD Front NVMe/SAS/SATA Kit (Recommended) 872223-B21

**NOTE:** Needs to be ordered with the HPE DL560 Gen10 Uni Media Bay Kit (872267-B21).

HPE DL560 NVMe 8 SSD Express Bay Enablement Kit (Recommended) 872225-B21

HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay1 Kit (Recommended) 872227-B21

HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay2 Kit (Recommended) 872229-B21

HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay3 Kit (Recommended) 872231-B21

HPE DL560 Gen10 4-port NVMe Mezzanine Card (Recommended) 874633-B21

HPE DL560 Gen10 8SFF HDD Bay1 Kit (Recommended) 872233-B21

HPE DL560 Gen10 8SFF HDD Bay2 Kit (Recommended) 872235-B21

HPE DL560 Gen10 8SFF HDD Bay3 Kit (Recommended) 872237-B21

HPE DL560 Gen10 Universal Media Bay Kit (Recommended) 872267-B21

**NOTE:** An optional Optical Disk Drive can be added, either DVD-ROM (726536-B21) or DVD-RW (726537-B21).

HPE DL5x0 Gen10 System Insight Display Kit (Recommended) 872261-B21

HPE DL560 Gen10 4x Power Supply Enablement Kit (Recommended) 875675-B21

**NOTE:** Must be ordered when selecting 4 power supplies.

HPE DL5x0 Gen10 CPU Mezzanine Board Kit (Recommended) 872222-B21

HPE DL5x0 Gen10 CPU Mezzanine UPI Performance Kit (Recommended) 875608-B21

**NOTE:** The HPE DL5x0 Gen10 CPU Mezz Kit (872222-B21) is needed for four processor configurations.

**NOTE:** The HPE DL5x0 Gen10 CPU Mezz Perf Kit (875608-B21) can only be used in a two processor configuration. This kit ships with the mezzanine tray and connects the two processors with 3 UPI (2 UPI links for 51xx processors) links.

**NOTE:** The HPE DL560 Gen10 8 SFF Bay 3 Cage/Backplane Kit (872237-B21) is shipped default with the server. The priority order of drive box population is Box 3, followed by Box 2 and then Box 1.

## HPE Processors

### Intel Xeon-Platinum - Recommended

HPE DL560 Gen10 Intel Xeon-Platinum 8180 (2.5GHz/28-core/205W) Processor Kit (Recommended) 872766-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8176 (2.1GHz/28-core/165W) Processor Kit (Recommended) 840379-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8168 (2.7GHz/24-core/205W) Processor Kit (Recommended) 872768-B21

**NOTE:** Ships with Performance Heatsink.

## Core Options

HPE DL560 Gen10 Intel Xeon-Platinum 8160 (2.1GHz/24-core/145W) Processor Kit (Recommended) 840381-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8156 (3.6GHz/4-core/105W) Processor Kit (Recommended) 840395-B21

### Intel Xeon-Platinum - Extended

HPE DL560 Gen10 Intel Xeon-Platinum 8180M (2.5GHz/28-core/205W) Processor Kit (Extended) 875335-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8170 (2.1GHz/26-core/165W) Processor Kit (Extended) 870730-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8165 (2.3GHz/24-core/205W) Processor Kit (Extended) P00790-B21

**NOTE:** Ships with Performance Heatsink.

**NOTE:** Supports "Core boosting" Learn more <http://www.hpe.com/info/ist>

**NOTE:** To enable this feature an iLO Advanced, or iLO Advanced Premium Security edition License are required.

HPE DL560 Gen10 Intel Xeon-Platinum 8164 (2.0GHz/26-core/150W) Processor Kit (Extended) 840383-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon -Platinum 8160M (2.1GHz/24-core/145W) Processor Kit (Extended) 875338-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8158 (3.0GHz/12-core/105W) Processor Kit (Extended) 840397-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Platinum 8153 (2.0GHz/16-core/125W) Processor Kit (Extended) 872841-B21

### Intel Xeon-Gold - Recommended

HPE DL560 Gen10 Intel Xeon-Gold 6154 (3.0GHz/18-core/200W) Processor Kit (Recommended) 872770-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6152 (2.1GHz/22-core/135W) Processor Kit (Recommended) 840387-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6148 (2.4GHz/20-core/145W) Processor Kit (Recommended) 840385-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6146 (3.2GHz/12-core/165W) Processor Kit (Recommended) 872824-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6136 (3.0GHz/12-core/150W) Processor Kit (Recommended) 872831-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6134 (3.3GHz/8-core/130W) Processor Kit (Recommended) 872833-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6130 (2.1GHz/16-core/125W) Processor Kit (Recommended) 840393-B21

HPE DL560 Gen10 Intel Xeon-Gold 6126 (2.6GHz/12-core/125W) Processor Kit (Recommended) 870734-B21

HPE DL560 Gen10 Intel Xeon-Gold 5120 (2.2GHz/14-core/105W) Processor Kit (Recommended) 870738-B21

HPE DL560 Gen10 Intel Xeon-Gold 5118 (2.3GHz/12-core/105W) Processor Kit (Recommended) 840399-B21

HPE DL560 Gen10 Intel Xeon-Gold 5115 (2.4GHz/10-core/85W) Processor Kit (Recommended) 875349-B21

### Intel Xeon-Gold - Extended

HPE DL560 Gen10 Intel Xeon-Gold 6150 (2.7GHz/18-core/165W) Processor Kit (Extended) 870732-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6144 (3.5GHz/8-core/150W) Processor Kit (Extended) 872826-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6143 (2.8GHz/16-core/205W) Processor Kit (Extended) P00788-B21

**NOTE:** Ships with Performance Heatsink.

## Core Options

**NOTE:** Supports “Core boosting” Learn more <http://www.hpe.com/info/ist>

**NOTE:** To enable this feature an iLO Advanced, or iLO Advanced Premium Security edition License are required.

HPE DL560 Gen10 Intel Xeon-Gold 6142 (2.6GHz/16-core/145W) Processor Kit (Extended) 872828-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6140 (2.3GHz/18-core/140W) Processor Kit (Extended) 840389-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6138 (2.0GHz/20-core/125W) Processor Kit (Extended) 872835-B21

HPE DL560 Gen10 Intel Xeon-Gold 6134M (3.2GHz/8-core/130W) Processor Kit (Extended) 875343-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6132 (2.6GHz/14-core/140W) Processor Kit (Extended) 840391-B21

**NOTE:** Ships with Performance Heatsink.

HPE DL560 Gen10 Intel Xeon-Gold 6128 (3.4GHz/6-core/115W) Processor Kit (Extended) 872839-B21

HPE DL560 Gen10 Intel Xeon-Gold 5122 (3.6GHz/4-core/105W) Processor Kit (Extended) 870736-B21

**NOTE:** If more than one processor is desired select one xxxxxx-L21 and one or three corresponding xxxxxx-B21 processors. Mixing different processor models is not supported.

## Memory Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, HPE recommends memory from the list located here: <http://www.hpe.com/products/recommend>.

Best product availability is limited to US, Canada, and Latin America at this time.

### HPE Memory

**NOTE:** Hewlett Packard Enterprise memory from previous generation servers is not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen10. For additional information, please see the [HPE SmartMemory QuickSpecs](#)

**NOTE:** LRDIMM and RDIMM are all distinct memory technologies and cannot be mixed within a server.

### Registered DIMMs (RDIMMs) - Recommended

HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended) 815097-B21

HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended) 815098-B21

HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended) 835955-B21

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended) 815100-B21

### Registered DIMMs (RDIMMs) - Extended

HPE 8GB (1x8GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Extended) 876181-B21

### Load Reduced DIMMs (LRDIMMs) - Recommended

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit (Recommended) 815101-B21

### Load Reduced DIMMs (LRDIMMs) - Extended

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Memory Kit (Extended) 815102-B21

**NOTE:** The maximum memory speed is a function of the memory type, memory configuration, and processor model.

### HPE Persistent Memory - Recommended

HPE 16GB NVDIMM Single Rank x4 DDR4-2666 Module Kit (Recommended) 845264-B21

## Core Options

**NOTE:** A maximum of 6 NVDIMMs are supported per processor and the DL560 can support a maximum of 24 NVDIMMs.

**NOTE:** Please refer to <http://www.hpe.com/info/persistentmemory> for NVDIMM population rules and guidelines.

### HPE Optical Drives - Recommended

HPE 9.5mm SATA DVD-ROM Optical Drive (Recommended) 726536-B21

**NOTE:** The optional Universal Media Bay Kits are required for this option. (HPE ProLiant DL560 Gen10 Universal Media Bay kit (872267-B21).

HPE 9.5mm SATA DVD-RW Optical Drive (Recommended) 726537-B21

**NOTE:** The optional Universal Media Bay Kits are required for this option. (HPE ProLiant DL560 Gen10 Universal Media Bay kit - 872267-B21).

HPE Mobile USB DVD-RW Optical Drive (Recommended) 701498-B21

**NOTE:** External

### HPE Drives

**NOTE:** The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

**NOTE:** Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

### Enterprise - 12G SAS - SFF Drives - Recommended

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) 870753-B21

HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) 872475-B21

HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) 870757-B21

HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) 872477-B21

HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) 870759-B21

HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) 872479-B21

HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD (Recommended) 872481-B21

HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD (Recommended) 881457-B21

### Enterprise - 12G SAS - SFF Drives - Extended

HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD (Extended) 870765-B21

### Midline - 12G SAS - SFF Drives - Recommended

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended) 832514-B21

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD (Recommended) 765464-B21

HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD (Recommended) 765466-B21

### Midline - 6G SATA - SFF Drives - Recommended

HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended) 655710-B21

HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD (Recommended) 765455-B21

### SSD Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, HPE recommends SSDs from the list located here: <http://www.hpe.com/products/recommend>.

### Write Intensive - 12G SAS - SFF - Solid State Drives - Recommended

HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 873351-B21

HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 873355-B21

## Core Options

### Write Intensive - 12G SAS - SFF - Solid State Drives - Extended

HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 873357-B21

### Read Intensive - 6G SATA - SFF - Solid State Drives - Recommended

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875503-B21

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) P04556-B21

HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) P06194-B21

HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875509-B21

HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) P04560-B21

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) P06196-B21

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875511-B21

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) P04564-B21

HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) P06198-B21

HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875513-B21

HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) P04566-B21

### Read Intensive - 6G SATA - SFF - Solid State Drives - Extended

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877740-B21

HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877746-B21

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877752-B21

HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877758-B21

HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) P06200-B21

HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877764-B21

HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) P04570-B21

### Read Intensive - 6G SATA - M.2 - Solid State Drives - Recommended

HPE 480GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD (Recommended) 875498-B21

### Read Intensive - 6G SATA - M.2 - Solid State Drives - Extended

HPE 960GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD (Extended) 875500-B21

### Read Intensive - 12G SAS - SFF - Solid State Drives - Recommended

HPE 480GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875311-B21

HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875313-B21

HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 872390-B21

HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875326-B21

HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 872392-B21

HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 872394-B21

### Read Intensive - 12G SAS - SFF - Solid State Drives - Extended

HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 875330-B21

HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 870144-B21

HPE 15.3TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 870148-B21

### Read/Write Intensive - NVMe - SFF - Solid State Drives - Recommended

HPE 375GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 878014-B21

### Read/Write Intensive - NVMe - SFF - Solid State Drives - Extended

HPE 480GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875587-B21

HPE 960GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875589-B21

## Core Options

HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875591-B21

HPE 4TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 877988-B21

**NOTE: A NVMe (872225-B21 or 872227-B21 or 872229-B21, 872231-B21) or Premium (872223-B21) drive cage are required to support these drives in conjunction with a NVMe riser kit or 4-port NVMe Mezzanine card .**

**NOTE: Not supported by HPE Smart Array controllers.**

### Mixed Use - 12G SAS - SFF - Solid State Drives - Recommended

HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 873359-B21

HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 872374-B21

HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 873363-B21

HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 872376-B21

HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 873365-B21

HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 872382-B21

HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 873367-B21

### Mixed Use - 12G SAS - SFF - Solid State Drives - Extended

HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 872386-B21

### Mixed Use - 6G SATA - SFF - Solid State Drives - Recommended

HPE 3.84TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) P00896-B21

HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875483-B21

HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875470-B21

HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 872344-B21

HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875474-B21

HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 872348-B21

HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875478-B21

HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) 872352-B21

### Mixed Use - 6G SATA - SFF - Solid State Drives - Extended

HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 880295-B21

HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877776-B21

HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877782-B21

HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877788-B21

### Mixed Use - 6G SATA - M.2 - Solid State Drives - Recommended

HPE 240GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD (Recommended) 875488-B21

### Mixed Use - 6G SATA - M.2 - Solid State Drives - Extended

HPE 480GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD (Extended) 875490-B21

HPE 960GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD (Extended) 875492-B21

### Dual SATA 6G M.2 - UFF to SFF SCM SSD - Recommended

HPE Dual 480GB SATA 6G Read Intensive M.2 - UFF to SFF SCM 3yr Wty Digitally Signed Firmware SSD (Recommended) P06609-B21

HPE Dual 240GB SATA 6G Mixed Use M.2 - UFF to SFF SCM 3yr Wty Digitally Signed Firmware SSD (Recommended) P06607-B21

### Mixed Use - NVMe - SFF - Solid State Drives - Recommended

HPE 400GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 875593-B21

HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 875595-B21

### Mixed Use - NVMe - SFF - Solid State Drives - Extended

HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875597-B21

## Core Options

**NOTE:** A NVMe (872225-B21 or 872227-B21 or 872229-B21, 872231-B21) or Premium (872223-B21) drive cage are required to support these drives in conjunction with a NVMe riser kit.

**NOTE:** Not supported by HPE Smart Array controllers.

### Hard Drive Blank Kits - Recommended

HPE Small Form Factor Hard Drive Blank Kit (Recommended) 666987-B21

### Hard Drive Kits - Recommended

HPE Universal SATA HHHL 3yr Wty M.2 Kit (Recommended) 878783-B21

**NOTE:** This is a M.2 enablement standup card.

HPE DL560 Gen10 8SFF HDD Bay1 Kit (Recommended) 872233-B21

HPE DL560 Gen10 8SFF HDD Bay2 Kit (Recommended) 872235-B21

HPE DL560 Gen10 8SFF HDD Bay3 Kit (Recommended) 872237-B21

### NVMe Kit - Recommended

HPE DL560 NVMe 8 SSD Express Bay Enablement Kit (Recommended) 872225-B21

HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay1 Kit (Recommended) 872227-B21

HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay2 Kit (Recommended) 872229-B21

HPE DL560 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay3 Kit (Recommended) 872231-B21

### Media Bay Kits - Recommended

HPE DL560 Gen10 Universal Media Bay Kit (Recommended) 872267-B21

HPE DL560 Gen10 2SFF Premium HDD Front NVMe/SAS/SATA Kit (Recommended) 872223-B21

**NOTE:** This kit can only be used with the HPE DL560 Gen10 Universal Media kit.

## HPE Networking

### 25 Gigabit Ethernet adapters - Recommended

HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter (Recommended) 817749-B21

HPE Ethernet 10/25Gb 2-port 640SFP28 Adapter (Recommended) 817753-B21

HPE Ethernet 10/25Gb 2-port 631FLR-SFP28 Adapter (Recommended) 817709-B21

HPE Ethernet 10/25Gb 2-port 631SFP28 Adapter (Recommended) 817718-B21

### 25 Gigabit Ethernet adapters - Extended

HPE Ethernet 10/25Gb 2-port 621SFP28 Adapter (Extended) 867328-B21

HPE Ethernet 10/25Gb 2-port 622FLR-SFP28 Converged Network Adapter (Extended) 867334-B21

### 10 Gigabit Ethernet adapters - Recommended

HPE Ethernet 10Gb 2-port 530SFP Adapter (Recommended) 652503-B21

HPE Ethernet 10Gb 2-port 530T Adapter (Recommended) 656596-B21

HPE Ethernet 10Gb 2-port 535T Adapter (Recommended) 813661-B21

### 10 Gigabit Ethernet adapters - Extended

HPE Ethernet 10Gb 2-port 521T Adapter (Extended) 867707-B21

HPE Ethernet 10Gb 2-port 562FLR-T Adapter (Extended) 817745-B21

HPE Ethernet 10Gb 2-port 562SFP+ Adapter (Extended) 727055-B21

HPE Ethernet 10Gb 2-port 562T Adapter (Extended) 817738-B21

**NOTE:** A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

**NOTE:** Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>

## Core Options

### 1 Gigabit Ethernet adapters - Recommended

HPE Ethernet 1Gb 4-port 331T Adapter (Recommended)	647594-B21
HPE Ethernet 1Gb 4-port 366T Adapter (Recommended)	811546-B21

### 1 Gigabit Ethernet adapters - Extended

HPE Ethernet 1Gb 2-port 332T Adapter (Extended)	615732-B21
HPE Ethernet 1Gb 2-port 361T Adapter (Extended)	652497-B21

### FlexibleLOM Adapters - Recommended

HPE Ethernet 1Gb 4-port 331FLR Adapter (Recommended)	629135-B22
HPE Ethernet 1Gb 4-port 366FLR Adapter (Recommended)	665240-B21
HPE FlexFabric 10Gb 2-port 533FLR-T Adapter (Recommended)	700759-B21
HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter (Recommended)	700751-B21
HPE Ethernet 10Gb 2-port 535FLR-T Adapter (Recommended)	817721-B21
HPE FlexFabric 10Gb 4-port 536FLR-T Adapter (Recommended)	764302-B21

### FlexibleLOM Adapters - Extended

HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter (Extended)	727054-B21
HPE Ethernet 100Gb 1-port 842QSFP28 Adapter (Extended)	874253-B21

**NOTE:** Please see the NIC QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>

### HPE InfiniBand - Recommended

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter (Recommended)	764285-B21
HPE InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter (Recommended)	879482-B21
HPE InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter (Recommended)	872726-B21

**NOTE:** Not supported on DL560 Gen10 24SFF chassis when System Inlet Temperature higher than 25°C.

HPE InfiniBand EDR 100Gb 1-port 841QSFP28 Adapter (Recommended)	872725-B21
HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel Omni-Path Architecture Adapter (Recommended)	829335-B21

### HPE InfiniBand - Extended

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter (Extended)	764284-B21
HPE InfiniBand EDR/Ethernet 100Gb 1-port 840QSFP28 Adapter (Extended)	825110-B21
HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter (Extended)	825111-B21

**NOTE:** For additional InfiniBand information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154440>

### HPE I/O Expansion Options - Recommended

HPE DL560 Gen10 x8/x8/x8 1-port 2 NVMe Slimline Riser Kit (Recommended)	873420-B21
HPE DL560 Gen10 4-port 8 NVMe Slimline Riser Kit (Recommended)	873418-B21
HPE DL560 Gen10 x8/x8 Tertiary Riser Kit (Recommended)	872253-B21
HPE DL Gen10 x16/x16 GPU Riser Kit (Recommended)	826704-B21
HPE DL Gen10 x8/x16/x8 Riser Kit (Recommended)	870548-B21
HPE DL560 Gen10 x8 1-port 2 NVMe Slimline Riser Kit (Recommended)	872255-B21
HPE DL560 Gen10 2-port 4 NVMe Slimline Tertiary Riser Kit (Recommended)	872257-B21

**NOTE:** Secondary and Tertiary risers are optional kits which can be utilized when system is populated with at least two (2) processors. Refer to “Expansion Slots” section for additional details on risers.

**NOTE:** For additional details on ProLiant DL Gen10 server risers please

visit: <https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>

## Core Options

### HPE Power Supplies - Recommended

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (Recommended) 830272-B21

**NOTE:** Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).

**NOTE:** 1600W Power supplies only support high line voltage (200VAC to 240VAC).

HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit (Recommended) 865434-B21

**NOTE:** Flex Slot -48VDC power supplies support power efficiency of up to 94%.

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (Recommended) 865414-B21

**NOTE:** Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (Recommended) 865438-B21

**NOTE:** Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

### HPE Power Supplies - Recommended

HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit (Extended) 865428-B21

**NOTE:** Flex Slot universal power supplies support power efficiency of up to 94% and support both 277VAC/380VDC power inputs.

**NOTE:** Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hpe.com/info/hppoweradvisor>

**NOTE:** All power supplies in a server should match. Mixing Power Supplies is not supported.

**NOTE:** Option kits contain the specified power supply and a PDU IEC cable.

**NOTE:** 1600W power supplies only support high line voltage.

**NOTE:** HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional HPE power cords.

### GPGPU information

Part number	Card	Qty support	Processor support	PCIe speed	8/16/24 SFF	Max. 8 NVMe	Greater than 8 NVMe
Q0V77A	NVIDIA Quadro P2000 GPU Module	2	All	Gen3	35C	35C	30C

**NOTE:** Check the power usage via the HPE Power Advisor Tool located at <http://www.hpe.com/info/hppoweradvisor>.

**NOTE:** A maximum of 2 GPU cards can be supported, 1 in primary riser expansion slot 2 and another in secondary riser expansion slot 5. Refer Expansion Slots sections for additional details on risers.

## Additional Options

### Recommended

Offering the best combination of performance, value and availability, Recommended Options have been selected by HPE experts to provide the right technology for a range of workloads and market segments. Fully integrated into the ProLiant management and security experience, Recommended Options provide the best fit with timely availability.

### Extended

Extended Options provide an extended catalog of products tailored for customers in specific markets or with specific workloads, requiring the utmost in performance or value. Fully integrated into the ProLiant management and security experience, Extended Options represent great value and performance but typically have a longer lead-time.

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

### iLO Advanced

HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features	BD506A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A
HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features	512486-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21

### HPE Converged Infrastructure Management Software

HPE OneView Physical Media Kit LTU	E5Y37A
------------------------------------	--------

### HPE OneView Advanced (with HPE iLO Advanced)

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A

### HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A

**NOTE:** Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>.

**NOTE:** Electronic and flexible-quantity licenses can be used to purchase multiple licenses with a single activation key.

**NOTE:** Please see the [HPE OneView QuickSpecs](#) for technical specifications and additional information.

### HPE PCIe Workload Accelerator Options

#### HPE Mixed Use PCIe Workload Accelerator - Extended

HPE 6.4TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card (Extended)	877829-B21
HPE 3.2TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card (Extended)	877827-B21
HPE 1.6TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card (Extended)	877825-B21
HPE 4TB PCIe x4 Lanes Read Intensive HHHL 3yr Wty Digitally Signed Firmware Card (Extended)	877831-B21

## Additional Options

HPE 750GB PCIe x4 Lanes Write Intensive HDDL 3yr Wty Digitally Signed Firmware Card (Extended) 878038-B21

**NOTE:** Please see the [HPE PCIe Workload Accelerators for ProLiant Servers QuickSpecs](#) for Technical Specifications and additional information.

### HPE Security

HPE Trusted Platform Module 2.0 Gen10 Option (Recommended) 864279-B21

HPE iLO Advanced Premium Security Upgrade Electronic License with 3yr Support on Licensed Features Q7E12AAE

HPE iLO Advanced Premium Security Edition License with 1yr Support on Licensed Features Q7E31A

HPE iLO Advanced Premium Security Flex Qty License with 1yr Support on Licensed Features Q7E32A

HPE iLO Advanced Premium Security Edition Electronic License with 1yr Support on Licensed Features Q7E32AAE

HPE iLO Advanced Premium Security Edition License with 3yr Support on Licensed Features Q7E33A

HPE iLO Advanced Premium Security Flex Qty License with 3yr Support on Licensed Features Q7E34A

HPE iLO Advanced Premium Security Edition Electronic License with 3yr Support on Licensed Features Q7E34AAE


HPE iLO Advanced Premium Security AKA Tracking License with 1yr Support on Licensed Features Q7E35A

HPE iLO Advanced Premium Security AKA Tracking License with 3yr Support on Licensed Features Q7E36A

**NOTE:** HPE Trusted Platform Module 2.0 Option (864279-B21) works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen9 servers or earlier generation variants.HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

### HPE Smart Array Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

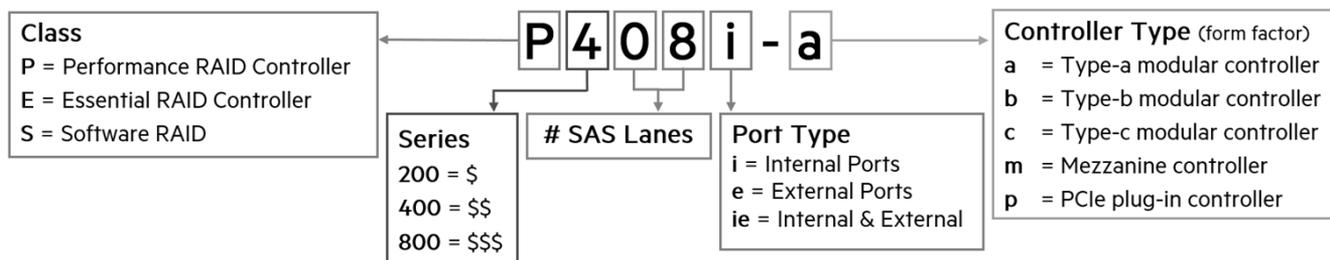

### Performance RAID Controllers - Recommended

**NOTE:** All performance RAID controllers are supported by the HPE Smart Storage Battery (Recommended) (P01366-B21), which supports multiple devices and is sold separately.

HPE Smart Array P816i-a SR Gen10 (16 Int Lanes/4GB Cache/SmartCache) 12G SAS Modular LH Controller (Recommended) 869083-B21

**NOTE:** Does not occupy a PCIe expansion slot.

HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular LH Controller (Recommended) 869081-B21

**NOTE:** Does not occupy a PCIe expansion slot.

HPE Smart Array P824i-p MR Gen10 (24 Internal Lanes/4GB Cache/CacheCade) 12G SAS PCIe Controller (Recommended) 870658-B21

HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller (Recommended) 830824-B21

HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller (Recommended) 804405-B21

## Additional Options

### Essential RAID Controllers - Recommended

HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular LH Controller (Recommended) 869079-B21

**NOTE:** Does not occupy a PCIe expansion slot.

HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller (Recommended) 804394-B21

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller (Recommended) 804398-B21

### Optional Software

HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU Q2F26AAE

HPE Smart Array SR SmartCache (Single Key/Single Server) LTU D7S26A

HPE Smart Array SR SmartCache (Single Key/Multiple Servers) LTU D7S27A

HPE Smart Array SR SmartCache (Single Key/Multiple Servers) E-LTU D7S27AAE

**NOTE:** SmartCache is offered on HPE Smart Array performance RAID controllers and comes standard (no licensing is required) if the HPE Smart Array P816i-a SR Gen10 LH Controller is installed in the server.

### Optional Upgrades - Recommended

HPE 96W Smart Storage Battery (up to 20 Devices) with 145mm Cable Kit (Recommended) P01366-B21

**NOTE:** Provides backup power for multiple HPE Smart Array controllers or other devices. Is required with performance RAID controllers and NVDIMMs.

HPE DL38X/560/580/ML350 Gen10 P824i-p Cable Kit (Recommended) P00614-B21

**NOTE:** Needs to be ordered with the HPE SmartArray P824i-p MR Gen10 controller.

### HPE Tape Backup

**NOTE:** For the complete range of tape drives, autoloaders, libraries and media see:

<https://www.hpe.com/us/en/storage/storeever-tape-storage.html>. For hardware and software compatibility of Hewlett Packard Enterprise tape backup products <http://www.hpe.com/storage/BURACompatibility>.

### HPE Storage Options

#### Emulex Fibre Channel HBAs - Recommended

HPE StoreFabric SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter (Recommended) Q0L13A

HPE StoreFabric SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter (Recommended) Q0L14A

HPE StoreFabric SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter (Recommended) Q0L11A

HPE StoreFabric SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter (Recommended) Q0L12A

#### QLogic Fibre Channel HBAs - Recommended

HPE StoreFabric SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter (Recommended) P9D93A

HPE StoreFabric SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter (Recommended) P9D94A

HPE StoreFabric SN1600Q 32Gb Single Port Fibre Channel Host Bus Adapter (Recommended) P9M75A

HPE StoreFabric SN1600Q 32Gb Dual Port Fibre Channel Host Bus Adapter (Recommended) P9M76A

#### Converged Network Adapter - Recommended

HPE StoreFabric CN1100R Dual Port Converged Network Adapter (Recommended) QW990A

HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged Network Adapter (Recommended) N3U52A

HPE StoreFabric CN1200E 10Gb Converged Network Adapter (Recommended) E7Y06A

HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged Network Adapter (Recommended) N3U51A

HPE StoreFabric CN1200R 10GBASE-T Converged Network Adapter (Recommended) Q0F26A

HPE StoreFabric CN1300R 10/25Gb Dual Port Converged Network Adapter (Recommended) Q0F09A

## Additional Options

### HPE Racks

**NOTE:** Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

**NOTE:** Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

**NOTE:** Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

### HPE Power Distribution Units (PDUs)

**NOTE:** Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

**NOTE:** Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

**NOTE:** Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.

**NOTE:** Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

### HPE Uninterruptible Power Systems (UPS)

**NOTE:** To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

**NOTE:** Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.

**NOTE:** Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

### HPE Rack Options

**NOTE:** Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.

#### Rail Kits - Recommended

HPE 2U Large Form Factor Easy Install Rail Kit (Recommended) 733662-B21

**NOTE:** Does not include CMA (Recommended) (733664-B21).

HPE 2U Cable Management Arm for Easy Install Rail Kit (Recommended) 733664-B21

HPE 2U Large Form Factor Ball Bearing Rail Kit (Recommended) 720864-B21

**NOTE:** Does not include CMA (Recommended) (720865-B21).

HPE 2U Cable Management Arm for Ball Bearing Rail Kit (Recommended) 720865-B21

**NOTE:** Rail kits are optional for DL560 Gen10 and are no longer included standard with the server. Customers have the option to purchase their server without a rail kit.

**NOTE:** Ball bearing and Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

**NOTE:** Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

### HPE USB and SD Options

#### HPE Enterprise Mainstream Flash Media Kits for Memory Cards - Recommended

HPE 32GB microSD Flash Memory Card (Recommended) 700139-B21

HPE 8GB microSD Flash Memory Card (Recommended) 726116-B21

HPE 8GB Dual microSD Flash USB Drive (Recommended) 741279-B21

HPE 8GB microSD Flash USB Drive (Recommended) 737953-B21

**NOTE:** Please see the [HPE Flash Media Kits QuickSpecs](#) for additional information.

## Additional Options

### HPE Support Services

#### Installation & Start-up Services

HPE Install ProLiant DL560 Service	U6H58E
HPE Startup ProLiant DL560 Service	U6H60E

#### Proactive Care

HPE 3 Year Proactive Care 24x7 DL560 Gen10 Service	H8PW6E
HPE 3 Year Proactive Care 24x7 with DMR DL560 Gen10 Service	H8PW7E
HPE 3 Year Proactive Care 24x7 with CDMR DL560 Gen10 Service	H8PW8E
HPE 3 Year Proactive Care Call-To-Repair DL560 Gen10 Service	H8PX5E
HPE 3 Year Proactive Care Call-To-Repair 24x7 with DMR DL560 Gen10 Service	H8PX6E
HPE 3 Year Proactive Care Call-To-Repair with CDMR DL560 Gen10 Service	H8PX7E


**NOTE:** For a full listing of support services available for this server, please visit <https://ssc.hpe.com/>

## Memory

### Memory Population guidelines

## HPE Gen10 DL360 / DL380 / DL560\* Servers

2 Slots per Channel

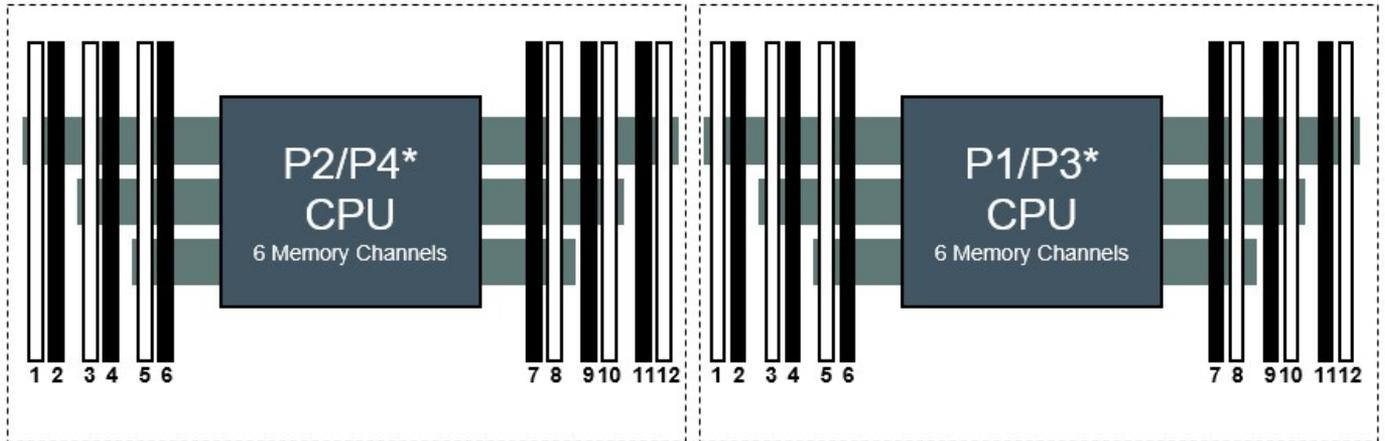

\* DL560 is a 4 socket server (uses P3, P4)

### Front of Server

HPE ProLiant Gen10 12 slot per CPU DIMM Population Order											
1 DIMM							8				
2 DIMMs							8		10		
3 DIMMs							8		10		12
4 DIMMs			3		5		8		10		
5 DIMMs *			3		5		8		10		12
6 DIMMs	1		3		5		8		10		12
7 DIMMs *	1		3		5		7 8		10		12
8 DIMMs			3	4	5	6	7 8	9	10		
9 DIMMs *	1		3		5		7 8	9	10	11	12
10 DIMMs *	1		3	4	5	6	7 8	9	10		12
11 DIMMs *	1		3	4	5	6	7 8	9	10	11	12
12 DIMMs	1	2	3	4	5	6	7 8	9	10	11	12

\* Unbalanced, not recommended

### General Memory Population Rules and Guidelines:

- . Install DIMMs only if the corresponding processor is installed.
- . If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- . To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- . When two processors are installed, balance the DIMMs across the two processors.
- . White DIMM slots denote the first slot to be populated in a channel.
- . Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- . The maximum memory speed is a function of the memory type, memory configuration, and processor model.

## Memory

- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit:  
<http://www.hpe.com/docs/memory-population-rules>
- To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required. For additional information, please see the [HPE DDR4 SmartMemory QuickSpecs](#).

### HPE 16GB NVDIMM for Gen10 Servers - Population Rules and Guidelines:

- Maximum of (12) 16GB NVDIMMs for 2 socket servers and (24) 16GB NVDIMMs for 4 socket servers.
- If NVDIMM-N interleaving is disabled, then any number of NVDIMM-Ns may be used, and the NVDIMM-Ns should be populated in this order:
  - Choose a CPU with open slots (based on NUMA proximity), if any.
  - Pick a channel with two open slots, if any. This keeps the NVDIMM-N from sharing bandwidth with regular memory. Populate the white slot.
  - Pick a channel with an open slot that already has an NVDIMM-N rather than a regular DIMM, if any. This slot must be a black slot. Keep NVDIMM-N traffic away from regular DIMM traffic.
- If NVDIMM-N interleaving is enabled, then the same interleaving balance restrictions that applied to regular DIMMs also apply to the NVDIMM-Ns using the remaining open slots. When assigning the NVDIMM-Ns to those open channels per the regular DIMM placement rules:
  - It's important to keep the same number of DIMMs on the same memory controller.
  - Choose the number of NVDIMM-Ns per CPU based on desired block device size and NUMA locality.
  - Pick a memory controller with a channel with two open slots, if any.
  - Pick a channel with two open slots, if any. This keeps the NVDIMM-N from sharing bandwidth with regular memory. Populate the white slot.
- Please visit the [HPE Server Memory Options Population Rules](#) for detailed configuration rules and best practices.

**Memory Speed Table - 500 Series Platforms - DL560 Gen 10**

DIMM Type	Register DIMM (RDIMM)				
HPE SKU P/N	815097-B21	876181-B21	815098-B21	835955-B21	815100-B21
<b>SKU Description</b>	HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended)	HPE 8GB (1x8GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Extended)	HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended)	HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended)	HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit (Recommended)
<b>DIMM Rank -&gt;</b>	Single Rank (1R)	Dual Rank (2R)	Single Rank (1R)	Dual Rank (2R)	Dual Rank (2R)
<b>DIMM Capacity -&gt;</b>	8 GB	8 GB	16 GB	16 GB	32 GB
<b>Voltage</b>	1.2V	1.2V	1.2V	1.2V	1.2V
<b>DRAM depth [bit]</b>	1G	512 MB	2G	1G	2G
<b>DRAM Width [bit]</b>	x8	x8	x4	x8	x4
<b>DRAM Density</b>	8 Gb	4 Gb	8 Gb	8 Gb	8 Gb
<b>CAS Latency</b>	19-19-19	19-19-19	19-19-19	19-19-19	19-19-19
<b>DIMM Native Speed (MT/s)</b>	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
	<b>Intel® Xeon® Platinum and Gold 81xx/61xx Processors Officially Supported Memory Speed (MT/s)</b>				
1 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
2 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s

## Memory

	Intel® Xeon® Gold 51xx Processors Officially Supported Memory Speed (MT/s)				
1 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s
2 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s

DIMM Type	Load Reduced (LRDIMM)	
HPE SKU P/N	815101-B21	815102-B21
SKU Description	HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit (Recommended)	HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Memory Kit (Extended)
DIMM Rank ->	Quad Rank (4R)	Octal Rank (8R)
DIMM Capacity ->	64 GB	128 GB
Voltage	1.2V	1.2 V
DRAM depth [bit]	2G	2G
DRAM Width [bit]	x4	x4
DRAM Density	8 Gb	8 Gb
CAS Latency	19-19-19	22-19-19
DIMM Native Speed (MT/s)	2666 MT/s	2666 MT/s
Intel® Xeon® Platinum and Gold 81xx/61xx Processors Officially Supported Memory Speed (MT/s)		
1 DIMM Per Channel	2666 MT/s	2666 MT/s
2 DIMM Per Channel	2666 MT/s	2666 MT/s
Intel® Xeon® Gold 51xx Processors Officially Supported Memory Speed (MT/s)		
1 DIMM Per Channel	2400 MT/s	2400 MT/s
2 DIMM Per Channel	2400 MT/s	2400 MT/s

For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>

### Standard and Maximum Memory Capacity (Pre-configured Models)

Pre Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
5120	32 GB (2 x 16 GB)	384 GB (24 x 16 GB)	6144GB (48 x 128 GB)
6130	64 GB (4 x 16 GB)	384 GB (24 x 16 GB)	6144GB (48 x 128 GB)
6148	128 GB (8 x 16 GB)	384 GB (48 x 16 GB)	6144GB (48 x 128 GB)
8170	256 GB (16 x 16 GB)	384 GB (48 x 16 GB)	6144GB (48 x 128 GB)
8164	256 GB (16 x 16 GB)	384 GB (48 x 16 GB)	6144GB (48 x 128 GB)

### DDR4 memory options part number decoder

**NOTE:** Capacity references are rounded to the common gigabyte (GB) values.

- 4 GB = 4,096 MB
- 8 GB = 8,192 MB
- 16 GB = 16,384 MB
- 32 GB = 32,768 MB
- 64 GB = 65,536 MB
- 128 GB = 131,072 MB

For more information on memory, please see the Memory QuickSpecs: [HPE DDR4 SmartMemory](#)

## Storage

8 SFF (+2 SFF) hot-plug drive model with Universal Media Bay



24 SFF (incl 12 NVMe SSDs) hot-plug drive model



## Technical Specifications

### System Unit

#### Dimensions

(H x W x D)

(with bezel)

8.75cm x 44.54cm x 75.47cm

3.44 x 17.54 x 29.71 in

#### Weight

(approximate)

34.12 kg

75.23 lb

18.45 kg

40.67 lb

Maximum: (all hard drives, power supplies, DIMMs and processors installed)

Minimum: (one processor, one standard heatsink, one air baffle, one hard drive, one power supply, one DIMM, one rail kit with CMA and one primary riser installed)

### Input Requirements

(per power supply)

#### Rated Input Voltage

100 - 127 VAC, 200 – 240 VAC, 240VDC for China Only (800W Platinum PS only)

200 – 240 VAC, 240VDC for China Only (800W Titanium PS only)

200 V to 277 VAC, 380 VDC (800W Universal PS only)

-40 VDC to -72 VDC, -48 VDC nominal input (800W -48VDC PS only)

200 - 240 VAC, 240 VDC for China only (1600W PS Only)

#### Rated Input Current

9.4 A (100 VAC), 4.5 A (200 VAC), 3.8 A at 240VDC for China Only (800W Platinum PS only)

4.35 A at 200 VAC 3.62 A at

240 VAC, 3.62 A at 240 VDC for China

Only (800W Titanium PS only)

4.5 A at 200 V AC, 3.2 A at 277 V AC, 2.3 A at 380 VDC - (800W Universal PS only)

26 A at -40 VDC input, 19 A at -48 VDC input, nominal input, 12.4 A at -72 VDC input - (800W -48VDC PS only)

8.7 A at 200 VAC, 7.2 A at 240 VAC - (1600W PS Only)

#### Rated Input Frequency

50 to 60 Hz (Not applicable for VDC ranges)

#### Maximum Rated Input Power

940 W (100 VAC), 900 W (200VAC), 912 W at 240 VDC for China Only - (800W Platinum PS only)

870 W at 200 VAC, 870 W at 240 VAC, 870 W at 240 VDC for China only - (800W Titanium PS only)

900 W at 200 VAC, 887 W at 277 VAC, 874 W at 380 VDC - (800W Universal PS only)

936 W at -40 VDC input 912 W at -48 VDC input, nominal input 900 W at -72 VDC input - (800W -48VDC PS only)

1734 W at 200 VAC 1720 W at 240 VAC - (1600W PS Only)

### BTU Rating

#### Maximum

3207 BTU/hr at 100 VAC, 3071 BTU/hr at 200 VAC, 3112 BTU/hr at 240 for China only - (800W Platinum PS only)

2969 BTU/hr at 200 VAC, 2969 BTU/hr at 240 VAC, 2969 BTU/hr at 240 VDC for China only - (800W Titanium PS only)

3071 BTU/hr at 200 VAC, 3026 BTU/hr at 277 VAC, 2982 BTU/hr at 380 VDC - (800W Universal PS only)

3194 BTU/hr at -40 VDC input, 3112 BTU/hr at -48 VDC input (nominal input), 3071 BTU/hr at -72 VDC input - (800W -48VDC PS only)

5918 BTU/hr at 200 VAC, 5884 BTU/hr at 240 VAC - (1600W PS Only)

### Power Supply Output

(per power supply)

#### Rated Steady-State Power

800 W at 100 VAC to 127 VAC input, 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Platinum PS only)

800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Titanium PS only)

## Technical Specifications

800 W at 200 VAC to 277 VAC input, 800 W at 380 VDC input - (800W Universal PS only)  
 800 W at -40 VDC to -72 VDC - (800W -48VDC PS only)  
 1600 W at 200 VAC to 240 VAC input, 1600 W at 240 VDC input - (1600W PS Only)

**Maximum Peak Power** 800 W at 100 VAC to 127 VAC input, 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Platinum PS only)  
 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Titanium PS only)  
 800 W at 200 VAC to 277 VAC input, 800 W at 380 VDC input - (800W Universal PS only)  
 800 W at -40 VDC to -72 VDC - (800W -48VDC PS only)  
 2200 W for 1ms (turbo mode) at 200 VAC to 240 VAC input - (1600W PS Only)

**NOTE:** To review typical system power ratings use the [HPE Power Advisor](#) which is available online located at url: <http://www.hpe.com/info/hppoweradvisor>.

<b>System Inlet Temperature</b>	<b>Standard Operating Support</b>	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
	<b>Extended Ambient Operating Support</b>	For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <a href="http://www.hpe.com/servers/ashrae">http://www.hpe.com/servers/ashrae</a>
		For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <a href="http://www.hpe.com/servers/ashrae">http://www.hpe.com/servers/ashrae</a>
	<b>Non-operating</b>	System performance may be reduced if operating in the extended ambient operating range or with a fan fault.
<b>Relative Humidity</b> (non-condensing)	<b>Operating</b>	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
	<b>Non-operating</b>	8% to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
<b>Altitude</b>	<b>Operating</b>	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
		3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

## Technical Specifications

Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

### Acoustic Noise

Listed are the declared A-Weighted sound power levels ( $L_{WA_d}$ ) and declared average bystander position A-Weighted sound pressure levels ( $L_{pAm}$ ) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Product Configuration	Entry	Base	Performance
Idle - $L_{WA_d}$	5.0 B	5.1 B	5.1 B
Idle - $L_{pAm}$	47 dBA	48 dBA	48 dBA
Operating - $L_{WA_d}$	5.3 B	5.7 B	5.6 B
Operating - $L_{pAm}$	50 dBA	54 dBA	53 dBA

**NOTE:** Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

### Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Please refer to the appropriate QuickSpecs lists below for technical specifications on controllers.

For information on the HPE Smart Array E208i-a SR G10 LH Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array E208i-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array E208e-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P408i-a SR G10 LH Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P408i-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P408e-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P816i-a SR G10 LH Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array P824i-p MR Gen10 Controller please refer to their [QuickSpecs](#).

### Environment-friendly Products and Approach- End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

## Summary of Changes

Date	Version History	Action	Description of Change
06-Aug-2018	Version 11	Added	New Solid State Drivers offering was added.
		Changed	Configuration Information - Factory Integrated Models and Core Options, Core Options, and Additional Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
04-Jun-2018	Version 10	Added	Added new PCIe workload accelerator and additional options on drives and NICs.
		Changed	Service and Support section was updated. Core Options, Additional Options, and Memory were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
02-Apr-2018	Version 9	Changed	Configuration Information - Factory Integrated Models and Core Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
05-Mar-2018	Version 8	Removed	Obsolete SKUs were removed from the QuickSpecs.
05-Feb-2018	Version 7	Added	Added New SSD offering.
		Changed	Maximum Internal Storage was revised. Core Options and Additional Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
18-Dec-2017	Version 6	Changed	Configuration Information - Factory Integrated Models and Core Options were revised.
04-Dec-2017	Version 5	Added	Added support for new core boosting Intel® Xeon® Processors 6143 and 8165 and support for up to 24 16GB NVDIMM.
		Changed	Processors and Memory were revised.
16-Oct-2017	Version 4	Added	Added note – 1600W Power supplies only support high line voltage (200VAC to 240VAC) – to power supplies.
		Changed	Memory section was revised.
25-Sep-2017	Version 3	Added	Added support for new Intel® Xeon® Processors 6144 and 6146. Added new 128 GB LRDIMM to support higher memory configurations to support 6 TB. New SSD offering and NICs options were added. Added HPE Support Services options.
		Changed	Standard Features, Core Options, Additional Options, and Memory section were revised.
7-Aug-2017	Version 2	Added	Added new Solid State Drives offering to the HPE Drives.
		Changed	Standard Features, Pre-configured Models, Configuration Information - Factory Integrated Models, Core Options, Additional Options, and Memory section were revised. Updated notes.
		Removed	Removed references to Insight Control.
11-Jul-2017	Version 1	New	New QuickSpecs.

## Summary of Changes



[Sign up for updates](#)

---

© Copyright 2018 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a00008181enw - 15931 - Worldwide - V11 - 6-August-2018

